

Straban Township • Adams County • Pennsylvania



1745 Granite Station Rd. Gettysburg, PA 17325
Phone: (717) 334-4833 Fax: (717) 334-0061
Email: office@strabantownship.com
Website: www.strabantownship.com

APPLICATION FOR DRIVEWAY PERMIT

Date Permit is Issued: ____/____/____ Fee: _____ Rcpt. # _____

Approved by:

Permit Officer: _____

PERMIT NO. _____

1. _____
Name of Applicant _____ Phone Number _____

2. _____
Address of Applicant _____

3. _____
Address of property to be improved along with any other location details _____

4. _____
Parcel Number _____

5. APPLICATION IS TO: Construct a New Driveway Alter an Existing Driveway

6. INTENDED USE
 Residential Commercial
 Industrial Other _____
Explain

7. LOCATION OF PROPOSED DRIVEWAY:
Road Name and Twp. Route No.: _____

Name and Distance of Nearest Intersection: _____
Name Distance

8. Posted Speed Limit: _____

9. Roadway Sight Distance _____ ft. Right Roadway Sight Distance _____ ft. Left
For the purpose of measuring sight distance, the drivers' eye height shall be 3.50 feet above the proposed access surface and highway pavement surface and the vehicles; height shall be 4.25 feet above the proposed access surface and highway surface.

10. Driveway Radius: _____ ft. Right Driveway Radius: _____ ft. Left

11. Contractor: _____
Name Contact Phone Number(s)

12. Certificate of Insurance: _____

13. A **SKETCH** is to be attached to this permit which shall include the widths, depths and R/W lines. Additional Requirements may be requested based on the specifics of this driveway.

14. **Three (3) copies** of this application and sketch shall be submitted to the Township office.

The Owner/Applicant will not obstruct the natural flow of water run-off in any way and will provide ditches and/or culvert(s) as necessary. If a culvert is to be used, both the size and type must be approved by the Straban Township Road Master.

I do hereby agree to construct said driveway in complete compliance with directions received during the field visit and under the conditions of this permit.

Signature of Applicant _____ / ____ / ____
Date

Accepted by: _____

For official use only:


Required installation details for installing the Driveway from the Straban Township representative:

DRIVEWAY CONSTRUCTION START DATE: ___/___/___ END DATE: ___/___/___


FINAL INSPECTION: ___/___/___ INSPECTOR: _____

**THIS APPLICATION IS FOR USE ON TOWNSHIP ROADS ONLY!
MINIMUM SPECIFICATIONS FOR CONSTRUCTION OF
ALL NEW DRIVEWAY ENTRANCES IN STRABAN TOWNSHIP**

1. Unstable material in driveway sub-grade shall be removed until stable material is encountered and replaced with 2A stone.
2. A four (4) inch for Residential and a six (6) inch for Industrial compacted bituminous material of BCBC or ID-3 to be installed.
3. Residential driveway needs to have a width at the edge of the public roadway of thirty (30) feet, extend eight (8) feet from the edge of the roadway with a tapered width to sixteen (16) feet.
4. Industrial driveway needs to have a width at the edge of the public roadway of thirty six (36) feet, extend eight (8) feet from the edge of the roadway with a tapered width to twenty eight (28) feet.
5. All entrances are to be installed with a grade that will not divert any water onto the roadway.
6. If a culvert pipe is required, it must be at least four (4) feet from the existing roadway and a minimum of thirty (30) feet in length.

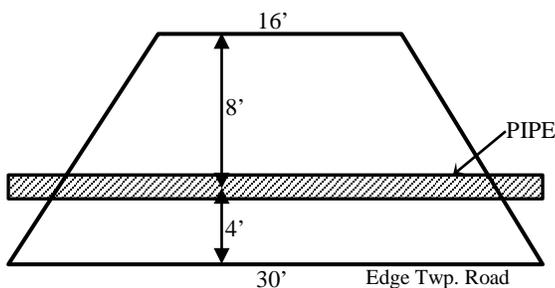

Residential Driveway

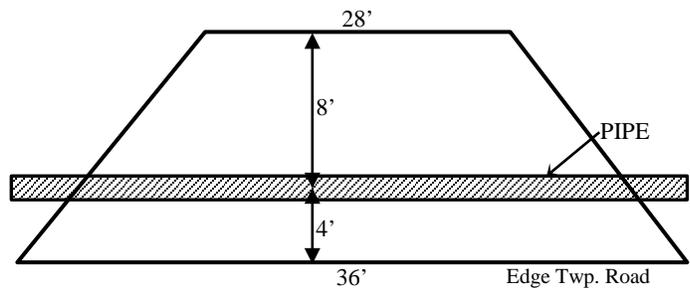

Industrial Driveway